
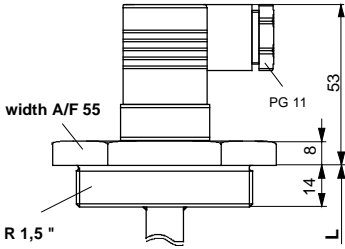
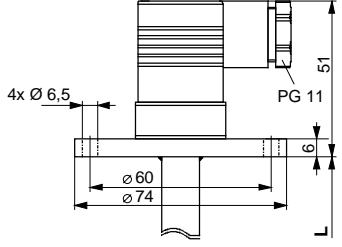
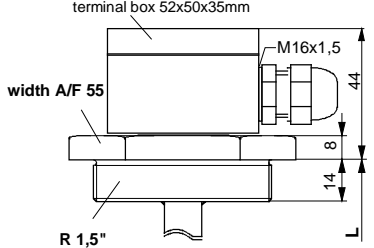
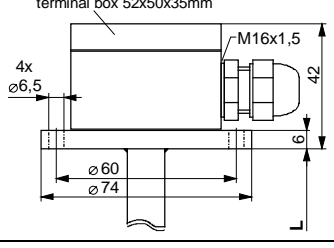

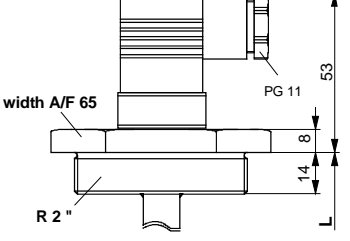


Overview of Connecting elements

Float switches
and
Level sensors

KROMA
FÜLLSTANDSMESSTECHNIK GmbH
Rostocker Straße 9-10 D-39124 Magdeburg
Telefon: +49(0)391/2538744 Fax: +49(0)391/2538745
E-Mail: info@KROMA.eu Internet: www.KROMA.eu

Connecting Elements for KROMA Float Switches and Level Sensors

Connecting element	Description	Instrument	Material		Drawing
			Stainless steel	Brass	
AA 1	Circular connector, M12x1	MWA 1 SS 1	X X		
AA 2	1,5" thread Rectangular connector (plastic)	MWA 1 MWAG 1 SS 1	X X X		
AA 3	Flange, 74mm Rectangular connector (plastic)	MWA 1 MWAG 1 SS 1	X X X		
AA 4	1,5" thread Terminal box	MWA 1 MWAG 1 SS 1	X X X		
AA 5	Flange, 74mm Terminal box	MWA 1 MWAG 1 SS 1	X X X		
AA 6	PG 11 thread Cable	MWA 1 MWAG 1 SS 1	X X X		
AA 7	2" thread Rectangular connector (plastic)	MWA 1 MWAG 1 SS 1 MWA 2 MWAG 2 MWAS 2 MWAT 2	X X X X X X	X X	

Connecting Elements for KROMA Float Switches and Level Sensors

Connecting element	Description	Instrument	Material		Drawing
			Stainless steel	Brass	
AA 8	Terminal box	MWA 1 MWAG 1 SS 1 MWA 2 MWAG 2	X X X X X		<p>terminal box 52x50x35mm M16x1,5 42 6 width A/F 22 L</p>
AA 9	Flange, 110mm Rectangular connector (plastic)	MWA 2	X		<p>6 off mounting bores Ø 9 mm equidistant hole circle 90mm PG 11 53 8 L</p>
AA 10	2" thread Terminal box	MWA 1 MWAG 1 SS 1 MWA 2 MWAG 2 MWAS 2 MWAT 2	X X X X X X	X X	<p>terminal box 52x50x35mm M16x1,5 44 width A/F 65 8 L</p>
AA 11	1,5" thread PG 9 Cable	MWA 1 MWAG 1 SS 1	X X X		<p>cable length 1,0m Ø 5 PG 9 width A/F 55 8 L</p>
AA 12	1,5" thread Bent cable	MWA 1 MWAG 1 SS 1	X X X		<p>cable length 1,0m Ø 5 width A/F 55 8 L</p>
AA 13	Flange, 110mm Terminal box	MWA 1 MWAG 1 SS 1 MWA 2 MWAG 2 MWAS 2 MWAT 2	X X X X X X		<p>6 off mounting bores Ø 9 mm equidistant hole circle 90mm terminal box 58x64x34mm M16x1,5 44 8 L</p>
AA 14	Flange, 110mm Harting connector	MWA 1 MWAG 1 SS 1 MWA 2 MWAG 2 MWAS 2 MWAT 2	X X X X X X		<p>6 off mounting bores Ø 9 mm equidistant hole circle 90mm M 20x1,5 (for protection hose) 37 8 L</p>

Connecting Elements for KROMA Float Switches and Level Sensors

Connecting element	Description	Instrument	Material		Drawing
			Stainless steel	Brass	
AA 15	2" thread PG 9 Cable	MWA 2 MWAG 2	X X	X X	
AA 16	2" thread Bent cable	MWA 2 MWAG 2	X X	X X	
AA 17	Flange, 160mm Rectangular connector (plastic)	MWA 2 MWAG 2 MWAS 2	X X X		
AA 18	Flange 74mm Harting connector	MWA 1 MWAG 1 SS 1	X X X		
AA 19	Installation from inside Circular connector, M12x1	MWA 2 (MWAG 2)	X		
AA 21	1" thread Rectangular connector (plastic)	MWA 0 SS 0	X X		
AA 22	1" thread Circular connector, M12x1	MWA 0 SS 0	X X		
AA 23	1" thread Connector as per DIN 72585 (plastic)	MWA 0 SS 0	X X		

Connecting Elements for KROMA Float Switches and Level Sensors

Connecting element	Description	Instrument	Material		Drawing
			Stainless steel	Brass	
AA 24	1" thread Flat-headed plug, width A/F 41 Connector as per DIN 43650 (plastic)	MWA 0 SS 0	X X		<p>connector as per DIN 43650 PG 11 width A/F 41 M32x1,5 Viton-seal as per DIN 3869 WD G1 M33x2</p>
AA 25	M12x1 thread, Installation from inside, width A/F 22 Circular connector M12	MWA 0 SS 0	X X		<p>nut M12x1 width A/F 22 ca. 5.5 4 Ø9 Ø19,5</p>
AA 26	1" thread, Raised plug, width A/F 27 Cable	MWA 0 SS 0	X X		<p>4x0,75mm² cable threaded cable connector or protective tube adaptor width A/F 27 G 1" seal as per DIN 3869 WD G1 M33x2, EPDM 16 16 Ø39</p>
AA 27	1" thread, Raised plug, width A/F 27 Aluminium box M16x1,5	MWA 0 SS 0	X X		<p>aluminium terminal box 58x64x34 threaded cable connector M16x1,5 brass width A/F 27 G 1" Viton-seal as per DIN 3869 WD G1 M33x2 52 16 Ø9 Ø39</p>
AA 28	M32x1,5 thread Flat-headed plug, width A/F 41 Cable	MWA 0 SS 0	X X		<p>3x0,75² cable width A/F 41 M32x1,5 Viton-seal as per DIN 3869 WD G1 M33x2 30 8 14 Ø9</p>
AA 29	M32x1,5 thread Flat-headed plug, width A/F 41 Connector, MIL SL10, 3-pole	MWA 0 SS 0	X X		<p>MIL-connector SL10-3 with bayonet lock width A/F 41 M32x1,5 Viton-seal as per DIN 3869 WD G1 M33x2 26 8 14 Ø9</p>